




FCS-3053 Versione H/w: 1

Fixed Dome Network Camera, 3-Megapixel, PoE 802.3af, Day & Night, IR LEDs

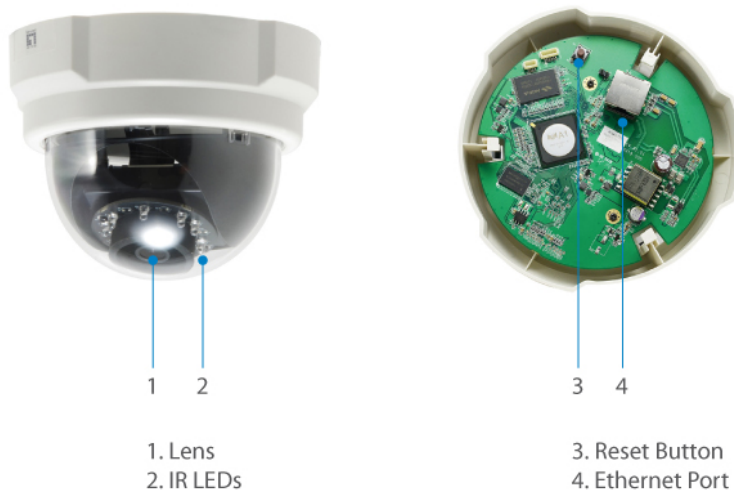

Key Features

- Risoluzione ad alta definizione 3 Megapixel
- LED a infrarossi integrato per la visione notturna fino a 20 m
- Compressione: H.264/MJPEG
- Filtro IR rimovibile per la sorveglianza diurna e notturna
- Supporto Alimentazione: Poe (IEEE 802.3af)
- Software di monitoraggio 64 canali gratuito fornito in dotazione (supporta App OneSecure)

Specifications

System Specifications

Image Sensor:

3-Megapixel 1/3.2" Progressive Scan CMOS

Connectors and Cabling:

1 x RJ-45 10/100 Mbps PoE port

**Button:**

Reset Button

Indicator:

Power & Link

Lens:

Fixed focal, Fixed iris, Fixed focus, f3.6mm, F1.8

IR Cut Filter:

Removable infrared-cut filter for day & night function

IR LED:

10 IR LEDs for illumination up to 20m

Shutter Time:

1/5 ~ 1/10,000 sec

Angle of View:

72°

Pan/Tilt/Zoom:

Digital Zoom to very high detail available on Software

Video Compression:

H.264 High Profile / MJPEG

Resolution:

3M(2048 x 1536)

Video Format:

RAW

Power:

Power Consumption: PoE Class 2 (IEEE802.3af) / 6.02 W (IR on)

Power Input: 802.3af PoE

Standards & Protocols:

IEEE 802.3 10-BASE-T, Ethernet

IEEE 802.3u 100-BASE-TX, Fast Ethernet

IEEE 802.3af Power over Ethernet (PoE)

IEEE 802.1X Network Access Control

TCP, UDP, HTTP, HTTPS, DHCP, PPPoE, RTP, RTSP, IPv6, DNS, DDNS, NTP, ICMP, ARP, IGMP, SMTP, FTP,

UPnP, SNMP, Bonjour

Features

Video:

Image Setting: - Adjustable image size, quality and bit rate

- Configurable brightness, sharpness, contrast, saturation, white balance and exposure

- AGC/AWB/AES

- Back Light Compensation (BLC)

- 2D Noise Reduction (2DNR)

Streaming: Up to 2 video streams

Performance

Data Transfer Rate:

10/100Mbps

Frame Rate:

15 fps at 2048 x 1536; 30 fps at 1920 x 1080; 30 fps at 1280 x 720; 30 fps at 640 x 480; 15 fps at 320 x 240

Minimum illumination:

Color: 0.1 lux

B/W: 0 lux (IR LED on) at F1.8

Environment

Temperature (°C):

Operating: -10°C ~ 50°C

Humidity (Non-condensing):

Operating: 10% ~ 85%

Physical Specifications

Dimensions (W x D x H mm):

128 x 99 x 128

Weight (g):

292 g

Others

Approval and Compliance:

CE, FCC, ONVIF


Deployment:

Wall/Ceiling Mount

Operation Systems:

Microsoft Windows 8/7/Vista/XP

Diagramma

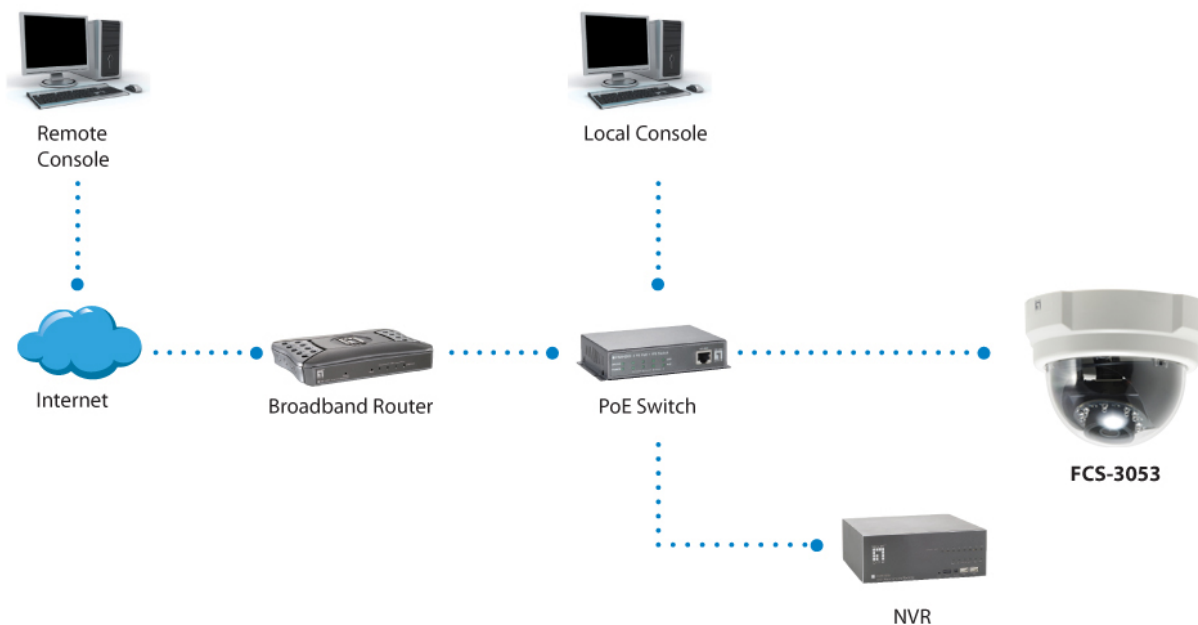

Order Information

FCS-3053

Package Contents

FCS-3053

Kit Montaggio

Kit Viti

Manuale d'installazione rapida



Accessori



CAS-2101
Mount Kit for all Dome Cameras



CAS-2313
Wall Mount for Indoor Domes



CAS-3002
Flush Mount Kit

All mentioned brand names are registered trademarks and property of their owners.
Copyright © Digital Data Communications GmbH, Germany. All Rights Reserved.